SHEET CONVEYING DEVICE AND RECORDING DEVICE

Patent number:

JP2000318898

Publication date:

2000-11-21

Inventor:

UCHIDA KOTA

Applicant:

CANON KK

Classification:

- international:

B65H29/20; **B65H29/20**; (IPC1-7): B65H29/20

- european:

Application number:

JP19990128131 19990510


Priority number(s):

JP19990128131 19990510

Report a data error here

Abstract of JP2000318898

PROBLEM TO BE SOLVED: To prevent a material to be recorded from being recessed before the material is recorded, and prevent traces of a sheet pressing spur from remaining on the recording surface of the material to be recorded. SOLUTION: This recording device is provided with a paper discharging roller 11 for discharging a material 3 to be recorded, arranged on the opposite side from the paper discharging roller 11, a paper discharging spur pressing- closely contacting coiled spring 13 pressing a paper discharging spur 12 to the paper discharging roller 11 side, a sheet pressing spur 14 for suppressing floating of the material 3 to be recorded, which has no paper discharging roller 11 on the opposite side, and a sheet pressing spur pressing-closely closely contacting coiled spring 15 for pressing the sheet pressing spur 14 on the material 3 to be recorded. Pressing force of the paper discharging spur pressing- closely contacting coiled spring 13 is different from that of the sheet pressing spur pressing-closely contacting coiled spring 15, and concretely, for example, the pressing force of the sheet pressing spur pressing-closely contacting coiled spring 15 is smaller than of the paper discharging spur pressing closely-contacting coiled spring 13.

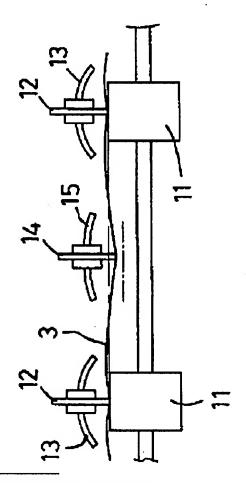

Data supplied from the **esp@cenet** database - Worldwide